

Panasonic

PT-VZ570 Series LCD Projectors

PT-VZ575N / PT-VZ570
PT-VW535N / PT-VW530
PT-VX605N / PT-VX600




For Meetings and Lectures
Just right



Vertical Lens Shift

Move Image Vertically without Distortion

Illustration shows lens shift capability of the PT-VW535N/VW530 with up to 48% adjustment from center of screen (manual).

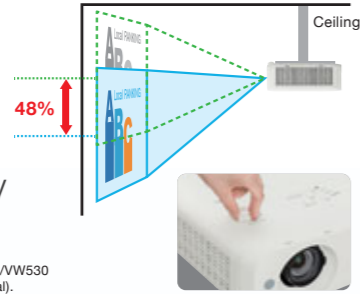

	PT-VZ575N / VZ570	PT-VW535N / VW530	PT-VX605N / VX600
Vertical Lens Shift	0 - +44%	0 - +48%	0 - +40%

Filter & Lamp Replacement Cycle
7,000 hrs.*1

DIGITAL LINK
PT-VZ575N / VW535N / VX605N

HDMI x 2

Silent 29 dB*2
Operation

Versatile LCD Portable Projector with
WUXGA

1,920 x 1,200 Resolution

PT-VZ575N / VZ570

PT-VZ575N / VZ570

4,800 lm WUXGA 10,000 : 1

PT-VW535N / VW530

5,000 lm WXGA 10,000 : 1

PT-VX605N / VX600

5,500 lm XGA 10,000 : 1



Memory Viewer

for PC-less Projection
PT-VZ575N / VW535N / VX605N



Project Wirelessly Your Way

Quick 3-Step Projection
PT-VZ575N / VW535N / VX605N


1 Select Input



2 Open App and Choose Network ID



3 Select Content and PROJECT!



Wireless connection using iOS and Android apps and PC software has been streamlined. Select the appropriate input, open the app, choose a network ID, select content, and start your presentation.


Work as a Group

Actively Collaborate with Your Team



High Value Cost-Performance Ratio and Efficiency

Lamp and filter replacement cycle is greatly extended with the usual cost of maintenance halved in Normal mode.

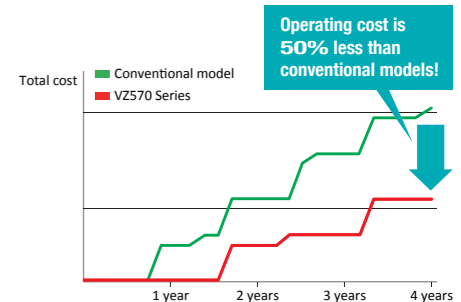

*1 With lamp power set to Eco. Up to 5,000 hours with lamp power set to Normal. Usage environment affects the lamp and filter replacement cycle.
*2 With lamp power set to Eco.

Outstanding Picture Quality

Introducing WUXGA*1 Resolution to Portable Projection

The PT-VZ575N/VZ570 portable LCD projectors feature WUXGA (1920 x 1200 pixel) resolution to bring native Full HD video to big screens in small spaces. Images are pin-sharp, liquid-smooth, and loaded with detail for an immersive viewing experience.

Exceptionally Bright and Clear Image Quality

The compact and lightweight PT-VZ570 Series outputs up to an impressive 5,500 lm². High brightness brings colors to life, adding punch and realism to presentations in well-lit rooms.

Whisper-Quiet Operation

The PT-VZ570 Series produces a barely audible 29 dB³ in Eco Mode. Your audience won't have to strain to hear in quiet scenes or be distracted by unwanted noise.

High 10,000:1 Contrast Ratio

Panasonic's winning formula for imaging brilliance is completed by a high 10,000:1 contrast ratio. Expect deep blacks, pure highlights, and crisp, easy to read text and graphics.

Daylight View Basic Suits Ambient Conditions

Daylight View Basic prevents the picture from washing out in bright rooms by sensing ambient light levels and adjusting the picture accordingly. Halftone color and brightness are automatically optimized to make images sharper and brighter in any environment.



Flexible Installation and Lower TCO

Lamp and Filter Replacement Extended to 7,000 Hours*4


The PT-VZ570 Series extends lamp and filter operational life to an impressive 7,000 hours*4 in Eco mode. It also halves the usual cost of projector maintenance in Normal mode. When maintenance is eventually due, you can replace both the lamp and filter at the same time (when used in Eco mode), even with the projector mounted on the ceiling.

Distortion-Free Vertical Lens Shift

The PT-VZ570 Series features a Vertical Lens Shift function that allows you to move the image up or down without distorting the picture. This is useful for quick image corrections in portable applications.

Horizontal, Vertical, and Corner Keystone Correction

Horizontal, vertical, and corner keystone correction adjusts the image shape for clear visibility when projecting off-axis or from an unusual angle. Should the vertical projection angle be altered during operation, Real-time Keystone Correction senses the change and makes any necessary corrections for optimal viewing.

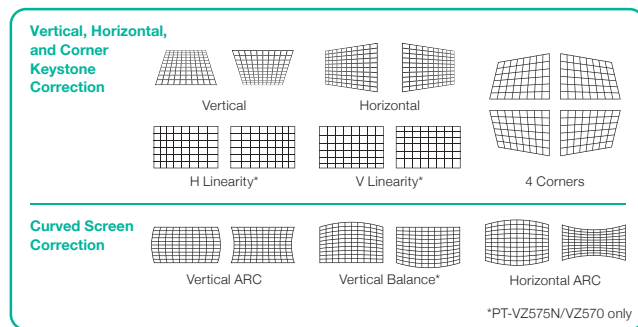

Project onto Curved Surfaces

Curved Screen Correction, meanwhile, allows you to project natural, distortion-free images onto curved or cylindrical surfaces (such as sculpted corporate reception walls, large pillars, etc.).



Images can be projected onto curved surfaces.

Compatible with Leading Control Systems

The PT-VZ570 Series plugs into existing projection networks controlled by Crestron Connected™, PJLink™ Class 1, and AMX software. Multi-Projector and Monitoring Software enables control of multiple projectors from a PC.




Project in Small or Large Spaces with 1.6x Zoom

PT-VZ570 Series projectors can be positioned almost anywhere with a variety of projection distances made possible by the 1.6x zoom lens function. The PT-VZ575N/VZ570, for example, enables projection distances of between 2.4 and 3.8 meters (7.7 to 12.5 feet) from a 100-inch-wide screen for large-format pictures in small, medium, or large rooms.

More Input Terminals Means More Versatility

Whether you're planning to install your PT-VZ570 Series projector on the ceiling or take it with you to a meeting, a generous selection of input terminals are included to connect a variety of source devices. These include two HDMI terminals and two RGB D-Sub ports for PC.

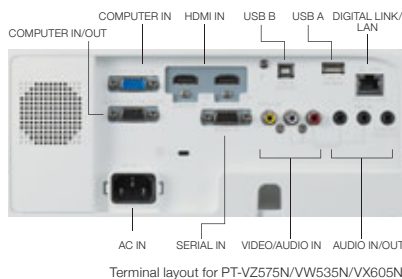

Share and Collaborate Your Way

Connect and Project Wirelessly from Almost Any Device

The PT-VZ575N, VW535N, and VX605N models let your team share and collaborate from iOS and Android devices as well as from Windows® and Mac computers, with streamlined 3-step connection for quick and easy wireless projection. You can:

- Connect any Miracast-compatible device and mirror whatever is on your screen, from Full HD video to websites and PowerPoint® documents
- Download free apps for iOS and Android devices and project a wide range of media*5 quickly and easily
- Transfer data from the screen of your PC or laptop via wireless LAN** using Wireless Manager ME 6.2 software*7, which features a new interface for faster connection. Multi-Live Mode enables simultaneous projection from up to 16 computers in split-screen mode
- Plug our Easy Wireless Stick*8 into your PC's USB port and project a wide variety of content—no app installation required.



USB Inputs for Portable Projection

You don't even need to a smartphone or PC to start projecting on the PT-VZ575N, VW535N, and VX605N models. The Memory Viewer function is a convenient way to project stills and video stored on USB memory devices, with MOV, AVI, MPG4, WMV, JPEG, and BMP files all supported*9. An additional USB port is included for PC connection*10.

DIGITAL LINK Makes Ceiling Installation Simple and Inexpensive

Developed using HDBaseT™ technology, the DIGITAL LINK connection*11 routes uncompressed Full HD video, audio, and Ethernet/RS-232C control commands through a single cable for distances of up to 100 m (328 ft). This greatly simplifies installation (especially when the projector is incorporated into an existing network or control system) while saving money on cable costs.




Additional Features

- Direct Power Off function enables safe projector shutdown via breaker switch
- Anti-theft measures include customizable startup logo, password protection, and security bar
- Auto Input Signal Search selects the input channel based on incoming signals
- Color-Board and Blackboard color-adjustment modes for projection in rooms without a screen


Projection distance										unit: meters [feet]										
PT-VZ575N / VZ570 (16:10 aspect ratio; throw ratio 1.1–1.8:1, UD ratio 17:1)					PT-VW535N / VW530 (16:10 aspect ratio; throw ratio 1.2–1.9:1, UD ratio 49:1)					PT-VX605N / VX600 (4:3 aspect ratio; throw ratio 1.2–1.9:1, UD ratio 9:1)										
Projection image size	Projection distance			Height from the edge of screen to center of lens			Projection image size	Projection distance			Height from the edge of screen to center of lens			Projection image size	Projection distance			Height from the edge of screen to center of lens		
Diagonal (inch)	min. (wide)	max. (tele)		min. (wide)	max. (tele)		Diagonal (inch)	min. (wide)	max. (tele)		min. (wide)	max. (tele)		Diagonal (inch)	min. (wide)	max. (tele)		min. (wide)	max. (tele)	
30"	0.7	[2.2]	1.1	[3.7]	0.02–0.20	[0.07–0.66]	30"	0.7	[2.4]	1.2	[4.0]	0.01–0.20	[0.03–0.66]	30"	0.7	[2.3]	1.1	[3.7]	0.05–0.23	[0.15–0.75]
40"	0.9	[3.0]	1.5	[4.9]	0.03–0.27	[0.1–0.88]	40"	1.0	[3.3]	1.6	[5.3]	0.01–0.27	[0.036–0.88]	40"	0.9	[3.1]	1.5	[5.0]	0.06–0.31	[0.2–1.0]
50"	1.2	[3.8]	1.9	[6.2]	0.04–0.34	[0.12–1.11]	50"	1.2	[4.1]	2.0	[6.7]	0.01–0.34	[0.043–1.11]	50"	1.2	[3.8]	1.9	[6.3]	0.08–0.38	[0.25–1.25]
60"	1.4	[4.6]	2.3	[7.5]	0.05–0.40	[0.15–1.33]	60"	1.5	[4.9]	2.4	[8.0]	0.02–0.40	[0.05–1.33]	60"	1.4	[4.6]	2.3	[7.6]	0.09–0.46	[0.3–1.5]
70"	1.6	[5.4]	2.7	[8.7]	0.05–0.47	[0.17–1.55]	70"	1.8	[5.8]	2.9	[9.4]	0.02–0.47	[0.06–1.55]	70"	1.7	[5.4]	2.7	[8.8]	0.11–0.53	[0.35–1.75]
80"	1.9	[6.2]	3.0	[10.0]	0.06–0.54	[0.2–1.77]	80"	2.0	[6.6]	3.3	[10.7]	0.02–0.54	[0.07–1.77]	80"	1.9	[6.2]	3.1	[10.1]	0.12–0.61	[0.4–2.0]
90"	2.1	[6.9]	3.4	[11.2]	0.07–0.61	[0.22–1.99]	90"	2.3	[7.4]	3.7	[12.1]	0.02–0.61	[0.08–1.99]	90"	2.1	[7.0]	3.5	[11.4]	0.14–0.69	[0.45–2.25]
100"	2.4	[7.7]	3.8	[12.5]	0.08–0.67	[0.25–2.21]	100"	2.5	[8.3]	4.1	[13.5]	0.03–0.67	[0.09–2.21]	100"	2.4	[7.8]	3.9	[12.7]	0.15–0.76	[0.5–2.5]
120"	2.8	[9.3]	4.6	[15.0]	0.09–0.81	[0.3–2.65]	120"	3.0	[9.9]	4.9	[16.2]	0.03–0.81	[0.1–2.65]	120"	2.9	[9.4]	4.6	[15.2]	0.18–0.91	[0.6–3.0]
150"	3.5	[11.6]	5.7	[18.8]	0.11–1.01	[0.37–3.31]	150"	3.8	[12.5]	6.2	[20.2]	0.04–1.01	[0.13–3.31]	150"	3.6	[11.7]	5.8	[19.1]	0.23–1.14	[0.75–3.75]
200"	4.7	[15.5]	7.6	[25.1]	0.15–1.35	[0.49–4.42]	200"	5.1	[16.6]	8.2	[27.0]	0.05–1.35	[0.18–4.42]	200"	4.8	[15.7]	7.8	[25.4]	0.31–1.52	[1.0–5.0]
250"	5.9	[19.4]	9.6	[31.4]	0.19–1.68	[0.61–5.52]	250"	6.3	[20.8]	10.3	[33.8]	0.07–1.68	[0.22–5.52]	250"	6.0	[19.6]	9.7	[31.8]	0.38–1.91	[1.25–6.25]
300"	7.1	[23.3]	11.5	[37.7]	0.22–2.02	[0.73–6.62]	300"	7.6	[25.0]	12.4	[40.6]	0.08–2.02	[0.3–6.62]	300"	7.2	[23.5]	11.6	[38.2]	0.46–2.29	[1.5–7.5]

Optional accessories

ET-PKL100H Ceiling Mount Bracket for High Ceilings	ET-PKL100S Ceiling Mount Bracket for Low Ceilings	ET-LAV400 Replacement Lamp Unit	ET-UW100* Easy Wireless Stick
ET-PKV400B Projector Mount Bracket	ET-RFV400 Replacement Filter Unit	ET-YFB100G Digital Interface Box	Brackets included for various installation needs, including server rack (EIA standards) mounting.
ET-SWA100 Series Early Warning Software			

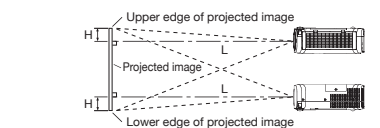

• The value for L (distance to screen) varies slightly depending on the zoom lens characteristics.
• At the shortest projection distance, the zoom lens characteristics may cause slight image distortion.

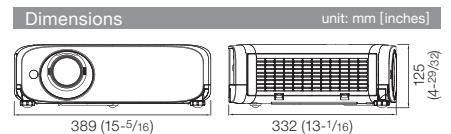

*1 For PT-VZ575N/VZ570. *2 PT-VZ575N and PT-VZ570 have 4,800 lm, PT-VW535N and PT-VW530 5,000 lm, and PT-VX605N and PT-VX600 5,500 lm of brightness. *3 Operational noise is 37 dB with the lamp power set to Normal. *4 With the lamp power set to Eco. Up to 5,000 hours with lamp power set to Normal. Usage environment affects the lamp and filter replacement cycle. *5 Supported media includes PowerPoint® documents, PDF files, JPEG images, web pages (iOS only), and photos (The App for iOS supports photos taken on internal camera only). *6 If the computer is not equipped with a wireless LAN function, a wireless LAN card is required. Only built-in wireless LAN is supported on Mac computers. Functions such as Live Mode and Multi-Live Mode can also be used with a wired LAN. *7 Wireless Manager ME 6.2 is supported by Windows Vista®, Windows® 7, Windows® 8/Windows® 8.1, and Mac OS X (v10.6/v10.7/v10.8/v10.9). *8 The optional ET-UW100 Easy Wireless Stick cannot transfer audio files. Only the 16-Window Index Style can be used in Multi-Live Mode. The ET-UW100 is available in the following countries and regions as of May 2014: North America, England, Germany, France, Spain, Italy, Belgium, Austria, Sweden, Norway, Denmark, Switzerland, Holland, Finland, Portugal, Greece, Australia, and Japan. A firmware update is necessary before using the ET-UW100. For more information, please visit our projector global website at <http://panasonic.net/avc/projector/>. *9 Some files may not be viewable even if they are encoded in a supported format. *10 USB inputs available on PT-VZ575N, VW535N, and VX605N only. The first time a USB cable is connected to USB B, a USB driver must be installed. *11 Only PT-VZ575N, VW535N, and VX605N include DIGITAL LINK.

Specifications							
Model	PT-VZ575N	PT-VZ570	PT-VW535N	PT-VW530	PT-VX605N	PT-VX600	
Power supply	AC 120 V, 50/60 Hz [North America], AC 110 V, 60 Hz [Taiwan], AC 100–240 V, 50/60 Hz [other countries]						
Power consumption	380 W [North America], 386 W [Taiwan], 386 W [other countries]	372 W [North America], 378 W [Taiwan], 378 W [other countries]	363 W [North America], 369 W [Taiwan], 369 W [other countries]	356 W [North America], 362 W [Taiwan], 362 W [other countries]	363 W [North America], 369 W [Taiwan], 369 W [other countries]	356 W [North America], 362 W [Taiwan], 362 W [other countries]	
Standby power consumption	Standby Mode [Eco] *1 0.2 W [North America], 0.2 W [Taiwan], 0.4 W [other countries]						
LCD panel	Standby Mode [Normal]	14 W	8 W	14 W	8 W	14 W	
	Panel size	0.64 inches (1.63 cm) [16:10 aspect ratio]		0.59 inches (1.50 cm) [16:10 aspect ratio]		0.63 inches (1.60 cm) [4:3 aspect ratio]	
	Display method	Transparent LCD panel [x 3, R/G/B]					
	Pixels	2,304,000 [1,920 × 1,200] × 3, total of 6,912,000 pixels		1,024,000 [1,280 × 800] × 3, total of 3,072,000 pixels		786,432 [1,024 × 768] × 3, total of 2,359,296 pixels	
Lens	1.6x manual zoom (throw ratio: 1.1–1.8:1), manual focus F 1.60–2.12, f 15.30–24.64 mm						
Lamp	270 W UHM lamp × 1						
Screen size [diagonal]	30–300 inches						
Brightness*2	4,800 lm (input signal: PC, lamp power: Normal, picture mode: Dynamic)		5,000 lm (input signal: PC, lamp power: Normal, picture mode: Dynamic)		5,500 lm (input signal: PC, lamp power: Normal, picture mode: Dynamic)		
Center-to-corner uniformity*2	85 %						
Contrast*2	10,000:1 [all white/all black] (input signal: PC, lamp power: Normal, picture mode: Dynamic, Iris: on)						
Resolution	1,920 × 1,200 pixels		1,280 × 800 pixels [Input signals that exceed this resolution will be converted to 1,280 × 800 pixels.]		1,024 × 768 pixels [Input signals that exceed this resolution will be converted to 1,024 × 768 pixels.]		
Scanning frequency	HDMI	525i [480i]*3, 625i [576i]*3, 525p [480p], 625p [576p], 750 [720]/60p, 750 [720]/50p, 1125 [1080]/24p, 1125 [1080]/24sF, 1125 [1080]/25p, 1125 [1080]/30p, 1125 [1080]/60p, 1125 [1080]/50p, 1125 [1080]/60i, 1125 [1080]/50i Displayable resolution: VGA to WUXGA [non-interlace], Dot clock frequency: 25 MHz to 162 MHz					
	RGB [analog]	fr: 15 kHz – 91 kHz, fv: 24 Hz – 100 Hz, dot clock: 162 MHz or lower					
	YPbPr [YCbCr]	fr: 15.73 kHz, fv: 59.94 Hz [525i [480i]] fr: 15.63 kHz, fv: 50 Hz [625i [576i]] fr: 31.47 kHz, fv: 59.94 Hz [525p [480p]] fr: 31.25 kHz, fv: 50 Hz [625p [576p]] fr: 45.00 kHz, fv: 60 Hz [750 [720]/60p]	fr: 37.50 kHz, fv: 50 Hz [750 [720]/50p] fr: 33.75 kHz, fv: 60 Hz [1125 [1080]/60i] fr: 28.13 kHz, fv: 50 Hz [1125 [1080]/50i] fr: 28.13 kHz, fv: 25 Hz [1125 [1080]/25p] fr: 27.00 kHz, fv: 24 Hz [1125 [1080]/24p]	fr: 27.00 kHz, fv: 48 Hz [1125 [1080]/24sF] fr: 33.75 kHz, fv: 30 Hz [1125 [1080]/30p] fr: 67.50 kHz, fv: 60 Hz [1125 [1080]/60p] fr: 56.25 kHz, fv: 50 Hz [1125 [1080]/50p]			
	Video/S-Video	fr: 15.73 kHz/15.63 kHz, fv: 59.94 Hz/50 Hz [NTSC/NTSC4.43/PAL/PAL60/PAL-N/PAL-M/SECAM]					
Optical axis shift	Vertical: 0–+44% from center of screen [manual], U/D ratio on top end: 17:1		Vertical: 0–+48% from center of screen [manual], U/D ratio on top end: 49:1		Vertical: 0–+40% from center of screen [manual], U/D ratio on top end: 9:1		
Keystone correction range	Vertical: maximum ±25° [auto/manual, input: WUXGA], Horizontal: maximum ±30° [manual, input: WUXGA]		Vertical: maximum ±35° [auto/manual, input: WXGA], Horizontal: maximum ±35° [manual, input: WXGA]		Vertical: maximum ±35° [auto/manual, input: XGA], Horizontal: maximum ±35° [manual, input: XGA]		
Installation	Front ceiling / Front desk / Rear ceiling / Rear desk						
Terminals	HDMI IN: HDMI 19-pin × 2 [Deep Color, compatible with HDCP], audio signal: Linear PCM [sampling frequency: 48 kHz/44.1 kHz/32 kHz]						
	COMPUTER IN 1: D-sub 15-pin [female] × 1 [RGB/Y • Pb [Cb] • Pr [Cr]/S-Video]						
	COMPUTER IN 2/MONITOR OUT: D-sub 15-pin [female] × 1 [RGB/Y • Pb [Cb] • Pr [Cr] (input/output switching)]						
	VIDEO IN: Pin jack × 1						
	AUDIO IN 1: M3 jack [L/R] × 1						
	AUDIO IN 2: M3 jack [L/R] × 1, compatible with MIC input						
	AUDIO IN 3: Pin jack [L/R] × 1						
	AUDIO OUT: M3 jack [L/R] × 1 [monitor out: variable]						
	SERIAL IN: D-sub 9-pin [female] × 1 for external control [RS-232C compliant]						
	USB A: Type A for Memory Viewer × 1	—	—	—	—	—	
	USB B: Type B for USB Display × 1	—	—	—	—	—	
	LAN/DIGITAL LINK: RJ-45 × 1 for network connection, 10Base-TX, DIGITAL LINK, 100Base-TX, compatible with PLink™	LAN: RJ-45 × 1 for network connection, 10Base-T/100Base-TX, compatible with PLink™	LAN/DIGITAL LINK: RJ-45 × 1 for network connection, 10Base-TX, DIGITAL LINK, 100Base-TX, compatible with PLink™	LAN: RJ-45 × 1 for network connection, 10Base-T/100Base-TX, compatible with PLink™	LAN/DIGITAL LINK: RJ-45 × 1 for network connection, 10Base-TX, DIGITAL LINK, 100Base-TX, compatible with PLink™	LAN: RJ-45 × 1 for network connection, 10Base-T/100Base-TX, compatible with PLink™	
	Built-in speaker	4.0 cm round shape × 1, output power: 10 W [monaural]					
Operating noise*2	37 dB [lamp power: Normal], 29 dB [lamp power: Eco]						
Cabinet materials	Molded plastic						
Dimensions [W × H × D]	389 × 125*5 × 332 mm [15-5/16 × 4-29/32*5 × 13-1/16 in]						
Weight*4	Approximately 4.9 kg [10.8 lbs]	Approximately 4.8 kg [10.6 lbs]	Approximately 4.9 kg [10.8 lbs]	Approximately 4.8 kg [10.6 lbs]	Approximately 4.9 kg [10.8 lbs]	Approximately 4.8 kg [10.6 lbs]	
Operating environment	Operating temperature: 0 °C–40 °C [32 °F–104 °F]*5 [altitude: less than 1200 m], 0 °C–30 °C [32 °F–86 °F] [altitude: 1200 m–2,700 m] Operating humidity: 20 %–80 % [no condensation]						
Supplied accessories	Wireless remote control unit × 1, Power cord with power cord holder × 1 [x 2 for UK and Asia], Software CD-ROM × 1 [Operating instructions, Multi Projector Monitoring and Control Software, Logo Transfer Software, Wireless Manager ME 6.2 software [PT-VZ575N/VW535N/VX605N only]], Batteries [AAA type × 2], RGB cable, Lens cap × 1						

*1 When the Standby Mode is set to Eco, network functions such as Power On via LAN will not operate. Also, only certain commands can be received for external control using the serial terminal.

*2 Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards. *3 Pixel-repetition signal [dot clock frequency: 27.0 MHz] only. *4 Average value. May differ depending on the actual unit. *5 With legs at shortest position. *6 When operating temperature is between 35 °C and 40 °C, lamp power automatically switches to Eco in order to protect the projector.

Built-in wireless LAN [PT-VZ575N/VW535N/VX605N]	Standard: 2.4 GHz: IEEE802.11b/g/n, 5.0 GHz: IEEE802.11a/n Infrastructure Mode: WPA-PSK [TKIP/AES], WPA2-PSK [TKIP/AES], 128-bit/64-bit WEP, WPA-EAP/WPA2-EAP [PEAP [MS-CHAPv2/GTC]/EAP-FAST [MS-CHAPv2/GTC]/EAP-TTLS [MD5/MS-CHAPv2], 128-bit/64-bit
---	---

Panasonic®



For more information about Panasonic projectors, please visit:
 Projector Global Web Site – panasonic.net/avc/projector
 Facebook – www.facebook.com/panasonicprojector
 YouTube – www.youtube.com/user/PanasonicProjector

Weights and dimensions shown are approximate. Specifications and appearance are subject to change without notice. Product availability differs depending on region and country. This product may be subject to export control regulations. The projection distances and throw ratios given in this leaflet are intended only as guidelines. For more detailed information, please consult the dealer from whom you are purchasing the product. Windows, Windows Vista and PowerPoint are trademarks of Microsoft Corporation in the United States and other countries. Android is a registered trademark or trademark of Google Inc. Mac, Mac OS X, iPad, iPhone, iPod touch and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. The PLink trademark is an application trademark in Japan, the United States, and other countries and regions or registered trademarks. Crestron Connected™ is a trademark of Crestron Electronics, Inc. HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Wi-Fi® and Miracast are trademarks or registered trademarks of Wi-Fi Alliance. HDBase™ is a trademark of the HDBaseT Alliance. All other trademarks are the property of their respective trademark owners. Projection images simulated. © 2014 Panasonic Corporation. All rights reserved.

All information included here is valid as of August 2014.

PT-VZ570G2 Printed in Japan.