

BP-20C25/20C20

A3 Colour MFPs



Simplicity³

Make everyday tasks much easier. And do it all with a lot more style!

With these new generation, entry-level A3 colour MFPs you can rediscover simplicity. By thinking outside the box, we've designed a new type of product to deliver essential business functionality.

If you want to print, copy, scan or fax*1 documents they get the job done quickly and easily – even from mobile devices. And their compact design adds a real touch of style to any office.

Simply more stylish

Why be ordinary, when you can be extraordinary. These MFPs have a unique cubic design with a distinctive two-tone colour scheme. And they are one of the smallest A3 colour devices available – measuring just $56 \times 56 \times 65.3^{*2}$ cm. So they can fit in almost anywhere and enhance the look of your workspace, making them an ideal choice for use on office desktops or in locations with restricted space.

They are simple to use, simple to manage and simply more stylish – it's simplicity³.

Simple to use

There's no complex set-up or messy cables. An optional wireless LAN lets you connect to any WiFi enabled device, so that anyone can print or scan directly from their smartphone, tablet or PC using AirPrint'², Google Cloud Print or the Sharpdesk Mobile app. Or insert a USB drive and simply select a file from the pop-up menu to directly print any stored documents or save scans to it without having to use a PC.



A stylish complement to any office space.



These MFPs are equipped with a range of features to ensure you can work more efficiently and with the minimum of fuss. A tiltable 4", 5-line LCD control panel lets you easily view and control the various settings and options. Pop-up messages will also appear when you add various media to the bypass tray to help you quickly select paper type and size settings.

To save time and effort when you're copying documents, they automatically rotate and sort multi-page documents into sets or let you copy the front and back of ID cards onto one page. Digitising and sharing information is also quick and simple, as you can scan and send documents in full colour.


Simple to manage

In addition, the MFPs are really easy to manage. You can check the machine and job status at a glance, even from a distance, thanks to the status indicator lamps. And they automatically enter an energy saving mode if they've been inactive for a while, so you save money.

Simply safer

Just because these MFPs are really simple to use, it doesn't mean that your sensitive business information is at risk. Like all of our MFPs, they include a range of security features designed to protect your documents:

- **User authentication** prevents any unauthorised access by requiring a password to be entered
- Device authentication restricts access to devices whose IP/MAC address is pre-registered
- Advanced network encryption keeps your information secure across the network using IPsec and SSL protocols
- $^{\star 1}$ Optional Fax module required BP-FX10
- \star_2 Optional Postscript required MX-PK11
- *3 Requires optional MX-EB18, Wireless LAN Adapter.

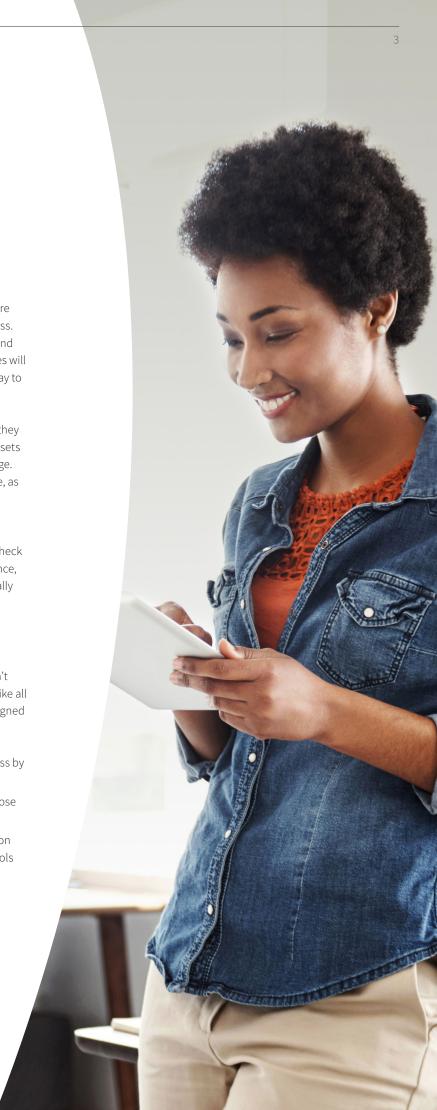

Specifications

General		
Engine speed (ppm/cpm) (Max)	A4*1	A3
BP-20C25	25	14
BP-20C20	20	12
Control panel display		ono LCD with hard key
Paper size (Min – Max)	A6*2 - A3W	
Paper weight (g/m²)	60 105	
Drawer 1 Drawers 2 - 4	60 - 105 60 - 220	
Multi-bypass	55 - 256	
Paper capacity (Std – Max)		
Sheets	350 - 1,850	
Drawers	1 - 4 (plus bypa:	ss tray)
Warm-up time*3 (seconds)	29*4	
Memory (GB)		
Copier/Printer (shared)	2	
Power requirements	Rated local AC	voltage ±10%, 50/60 Hz
Power consumption (kW) (Max)	1.84 (220 to 240	V)
Dimensions (mm) (W x D x H) BP-20C25/BP-20C20	560 x 560 x 653	
Weight (kg) (approx.) BP-20C25/BP-20C20	52	
Copier		
Original paper size (Max)	A3	
First copy time ^{⋆5} (seconds)	Colour 11.5	B/W 8.0
First copy time*5 (seconds) Continuous copies (Max)		
	11.5	
Continuous copies (Max) Print resolution (dpi) Scan	11.5 999 600 x 600, 600 x	8.0
Continuous copies (Max) Print resolution (dpi) Scan Print	11.5 999 600 × 600, 600 × 600 × 600	8.0
Continuous copies (Max) Print resolution (dpi) Scan	11.5 999 600 x 600, 600 x	8.0
Continuous copies (Max) Print resolution (dpi) Scan Print	11.5 999 600 × 600, 600 × 600 × 600 256	8.0
Continuous copies (Max) Print resolution (dpi) Scan Print Gradation levels	11.5 999 600 × 600, 600 × 600 × 600 256	8.0 400 00 using RSPF) in 1% increments
Continuous copies (Max) Print resolution (dpi) Scan Print Gradation levels Zoom range (%)	11.5 999 600 x 600, 600 x 600 x 600 256 25 - 400, (25 - 20	8.0 400 00 using RSPF) in 1% increments
Continuous copies (Max) Print resolution (dpi) Scan Print Gradation levels Zoom range (%) Preset copy ratios (Metric)	11.5 999 600 x 600, 600 x 600 x 600 256 25 - 400, (25 - 20	8.0 400 00 using RSPF) in 1% increments
Continuous copies (Max) Print resolution (dpi) Scan Print Gradation levels Zoom range (%) Preset copy ratios (Metric) Network Printer	11.5 999 600 × 600, 600 × 600 × 600 256 25 - 400, (25 - 20 10 ratios (5R/5E)	8.0 400 00 using RSPF) in 1% increments
Continuous copies (Max) Print resolution (dpi) Scan Print Gradation levels Zoom range (%) Preset copy ratios (Metric) Network Printer Resolution (dpi)	11.5 999 600 × 600, 600 × 600 × 600 × 600 256 25 - 400, (25 - 20) 10 ratios (5R/5E) 600 × 600 USB 2.0, 10Base Standard: Wind 2016, Windows'	8.0 20 using RSPF) in 1% increments 20 using RSPF) in 1% increments
Continuous copies (Max) Print resolution (dpi) Scan Print Gradation levels Zoom range (%) Preset copy ratios (Metric) Network Printer Resolution (dpi) Interface	11.5 999 600 × 600, 600 × 600 × 600 × 600 256 25 - 400, (25 - 21 10 ratios (5R/5E) 600 × 600 USB 2.0, 10Bass Standard; Windows' Optional*6: Mac	8.0 20 using RSPF) in 1% increments 20 using RSPF) in 1% increments
Continuous copies (Max) Print resolution (dpi) Scan Print Gradation levels Zoom range (%) Preset copy ratios (Metric) Network Printer Resolution (dpi) Interface Supported OS	11.5 999 600 × 600, 600 × 600 × 600 256 25 - 400, (25 - 20 10 ratios (5R/5E) 600 × 600 USB 2.0, 10Bast Standard: Wind 2016, Windows Optional*6: Mac 10.12, 10.13, 10 TCP/IP	8.0 20 using RSPF) in 1% increments 2-T/100Base-TX/1000Base-T lows Server® 2008, 2008R2, 2012, 2012R2, 8 7, 8.1, 10 .OSX 10.6, 10.7, 10.8, 10.9, 10.10, 10.11, 14 port 9100), FTP for downloading print
Continuous copies (Max) Print resolution (dpi) Scan Print Gradation levels Zoom range (%) Preset copy ratios (Metric) Network Printer Resolution (dpi) Interface Supported OS	11.5 999 600 x 600, 600 x 600 x 600 x 600 256 25 - 400, (25 - 20) 10 ratios (5R/5E) 600 x 600 USB 2.0, 10Base Standard: Wind 2016, Windows' Optional*6, Mac 10.12, 10.13, 10 TCP/IP LPR, Raw TCP (If files, IPP, SMB,) Standard: PCL 6	8.0 20 using RSPF) in 1% increments 2-T/100Base-TX/1000Base-T lows Server* 2008, 2008R2, 2012, 2012R2, 8 7, 8.1, 10 .OS X 10.6, 10.7, 10.8, 10.9, 10.10, 10.11, 14 port 9100), FTP for downloading print WSD

Network Scanner

Scan method		Push scan (via control panel) Pull scan (TWAIN-compliant application)		
Scan speed *7 (ipm) BP-20C25/BP-20C20	One-sided 37	Two-sided 15		
Resolution (dpi) (Max) Push scan Pull scan	100, 150, 200, 3 75, 100, 150, 20 50 to 9,600 dpi			
File formats	TIFF, PDF, JPEG*9			
Scan destinations	Scan to e-mail, desktop*¹º, FTP server, network folde (SMB), USB memory			
Scanner utilities	Sharpdesk			


Fax (optional FX10 required)

· un (optional intro required)		
Compression method	MH/MR/MMR/JBIG	
Communication protocol	Super G3	
Transmission time*11 (seconds)	2	
Modem speed (bps)	33,600 – 2,400 with automatic fallback	
Recording width	A5 - A3	
Memory (MB)	64	

Wireless LAN (optional MX-EB18 required)

(- p	===- :
Compliant regulation	IEEE802.11n/g/b
Access mode	Infrastructure mode, Software AP mode
Security	WEP, WPA/WPA2-mixed PSK, WPA/WPA2-mixed EAP*12, WPA2 PSK, WPA2 EAP*12

Configurations

















*¹ Long-edge feeding, *² Only short-edge feeding can be used with A6 paper, *³ In a standard measurement environment. May vary depending on operating conditions and environment. ** Under tray, using document glass, MFP in fully ready condition. May vary depending on operating conditions and environment. ** Requires optional MX-PK11. *¹ Scan speeds measured in accordance with IsO/IEC 24735:2009 standard for devices equipped with an automatic document feeder only. Scan speed will vary depending on the type of document the scan settings, operating conditions and environment. Based on Sharp's A4 standard chart, using document feedering, one-sided scanning and factory default settings. *¹ Resolution will vary depending on the size of the scanned area. *¹ Colour/greyscale only. *¹¹ Requires optional Sharpdesk License Kit. *¹¹ Based on Sharp's standard chart with approx. 700 characters (A4 short-edge feeding) at standard resolution in Super G3 mode, 33,600 bps, JBIG compression. *¹² Not applicable to Software AP Mode.

Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Mac is a trademark of Apple Inc. registered in the US and/or other countries. PostScript 3 is either a registered trademark or trademark of Adobe Systems Incorporated in the US and/or other countries. PCL is a registered trademark of Hewlett-Packard Company. All other company names, product names and logotypes are trademarks or registered trademarks of their respective owners. @Sharp Corporation July 2019.

Ref. BP-20C25/BP-20C20 Brochure. Job: 20031. All trademarks acknowledged. E&OE.

